REMARKS

This Amendment supplements Amendment A, filed April 29, 2002. Specifically, claim 10 has been amended to correct for typographical and transcription errors.

Attached hereto is a marked-up version of the changes made to the claims by the current amendment, captioned "**Version with Markings to Show Changes Made.**"

Applicant submits that this Application, including claims 10-15, is in condition for allowance, which is respectfully requested. The Examiner is invited to contact the undersigned attorney if an interview would expedite prosecution.

Respectfully submitted,

GREER, BURNS & CRAIN, LTD.

By 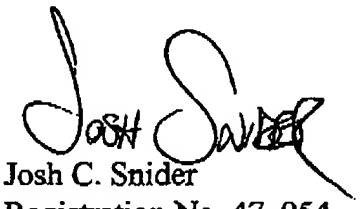

Josh C. Snider
Registration No. 47, 954

May 10, 2002

Customer No. 24978

300 South Wacker Drive
Suite 2500
Chicago, Illinois 60606
Telephone: (312) 360-0080
Facsimile: (312) 360-9315
f:\wp60\dna\13243957\supplemn.wpd

1324.63875 Serial No. 09/551,362

VERSION WITH MARKINGS TO SHOW CHANGES MADE

IN THE CLAIMS:

Claim 10 has been amended as follows:

10. (Amended) An active matrix type display comprising:

a plurality of gate wirings formed on a substrate;

a plurality of data wirings formed on the substrate substantially orthogonal to the gate wirings;

a plurality of pixel electrodes formed in a plurality of pixel areas decided by the gate wirings and the data wirings and arranged in a matrix shape;

A thin film transistor formed in each of the pixel areas and structured planar type having an operating semiconductor layer formed on the substrate, a gate insulating film formed on the operating semiconductor layer, a gate electrode formed on the gate insulating film and connected to one of the gate wirings, first and second semiconductor layers formed on both sides of the operating semiconductor layer including impurity, a source electrode including the first semiconductor layer electrically connected to the pixel electrode via a contact window opened to first and second insulating layers laminated on the first

semiconductor layer, and a drain electrode including the second semiconductor layer and connected to the data wirings; and

a plurality of storage capacitor electrodes using the first semiconductor layer as a first storage capacitor electrode, having a second storage capacitor electrode being formed between the first insulating film and the second insulating film and connected to a storage capacitor wiring maintained at a predetermined potential, wherein at least a first storage capacitor is structured by the first storage capacitor electrode, the first insulating film and the second storage capacitor electrode, and a second storage capacitor is structured by the second storage capacitor electrode, the second insulating film and the pixel electrode.